


Data sheet

| | |
|----------------|---|
| Part No. | BSSL |
| Description | rigid conduit, plain ends light compression resistance, light impact resistance |
| Colour | black, similar to RAL 9005 white, similar to RAL 9010 |
| Classification | 22211 |



Standard: EN 61386-21

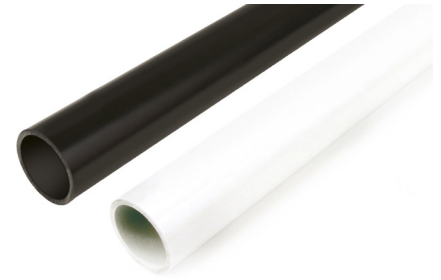

| Compression resistance | Impact resistance | Operating temperature | Bending strength | Material |
|------------------------|-------------------|-----------------------|------------------|----------|
| > 320 N | > 1 J | -5 to +60 °C | Rigid | PVC-U |

| Art. no. | Outer diameter | Inner diameter | ps | pl |
|--------------------|----------------|----------------|-----|------|
| 061 882 BSSL 20 WH | 20 mm | 17,4 mm | 3 m | 90 m |
| 061 884 BSSL 25 WH | 25 mm | 22,1 mm | 3 m | 90 m |
| 024 912 BSSL 20 BK | 20 mm | 17,4 mm | 3 m | 90 m |
| 034 997 BSSL 25 BK | 25 mm | 22,1 mm | 3 m | 90 m |

